

BRUCK.



BLOP DUR



BLOP MOLL







ALS PENDELLEUCHE
AS PENDANT LUMINAIRE

BLOP DUR LV S

BLOP DUR AC S

BLOP MOLL LV S

BLOP MOLL AC S



| | | | |
|-----------|------------|---------------------------|-----------|
| CRI 90 | LED 15W | 1200 lm ^{min} | 2700 K |
|-----------|------------|---------------------------|-----------|

OPTION

| | | | |
|--------------|-----------|--------------|------|
| Dim2 warm | 3000 K | Cas- ambi | DALI |
|--------------|-----------|--------------|------|

| | | | |
|-----------|------------|--------------------------|-----------|
| CRI 90 | LED 12W | 950 lm ^{min} | 2700 K |
|-----------|------------|--------------------------|-----------|

OPTION

| |
|--------------|
| Cas- ambi |
|--------------|

| | | | |
|-----------|------------|---------------------------|-----------|
| CRI 90 | LED 15W | 1200 lm ^{min} | 2700 K |
|-----------|------------|---------------------------|-----------|

OPTION

| | | | |
|--------------|-----------|--------------|------|
| Dim2 warm | 3000 K | Cas- ambi | DALI |
|--------------|-----------|--------------|------|

| | | | |
|-----------|------------|--------------------------|-----------|
| CRI 90 | LED 12W | 950 lm ^{min} | 2700 K |
|-----------|------------|--------------------------|-----------|

OPTION

| |
|--------------|
| Cas- ambi |
|--------------|

ALS LEUCHE MIT OFFENEM KABELNDE FÜR MAXIMUM UND OV/RD BALDACHINE
AS LUMINAIRE WITH OPEN CABLE END FOR MAXIMUM AND OV/RD CANOPIES

BLOP DUR LV OE

BLOP MOLL LV OE



| | | | |
|-----------|------------|---------------------------|-----------|
| CRI 90 | LED 12W | 1200 lm ^{min} | 2700 K |
|-----------|------------|---------------------------|-----------|

OPTION

| | | |
|--------------|-----------|-----------|
| Dim2 warm | 3000 K | 350mA |
|--------------|-----------|-----------|

| | | | |
|-----------|------------|---------------------------|-----------|
| CRI 90 | LED 12W | 1200 lm ^{min} | 2700 K |
|-----------|------------|---------------------------|-----------|

OPTION

| | | |
|--------------|-----------|-----------|
| Dim2 warm | 3000 K | 350mA |
|--------------|-----------|-----------|



ALS PENDELLEUCHTE FÜR ALL-IN
AS PENDANT LUMINAIRE FOR ALL-IN

BLOP DUR ALL-IN

BLOP MOLL ALL-IN



| | | | |
|-----|-----|-----|------|
| CRI | LED | min | 2700 |
| 90 | 12W | 950 | K |
| | | lm | |

| | | | |
|-----|-----|-----|------|
| CRI | LED | min | 2700 |
| 90 | 12W | 950 | K |
| | | lm | |

ALS PENDELLEUCHTE FÜR DUOLARE
AS PENDANT LUMINAIRE FOR DUOLARE


BLOP DUR DLR

BLOP MOLL DLR



| | | | |
|-----|-----|-----|------|
| CRI | LED | min | 2700 |
| 90 | 12W | 950 | K |
| | | lm | |

| | | | |
|-----|-----|-----|------|
| CRI | LED | min | 2700 |
| 90 | 12W | 950 | K |
| | | lm | |

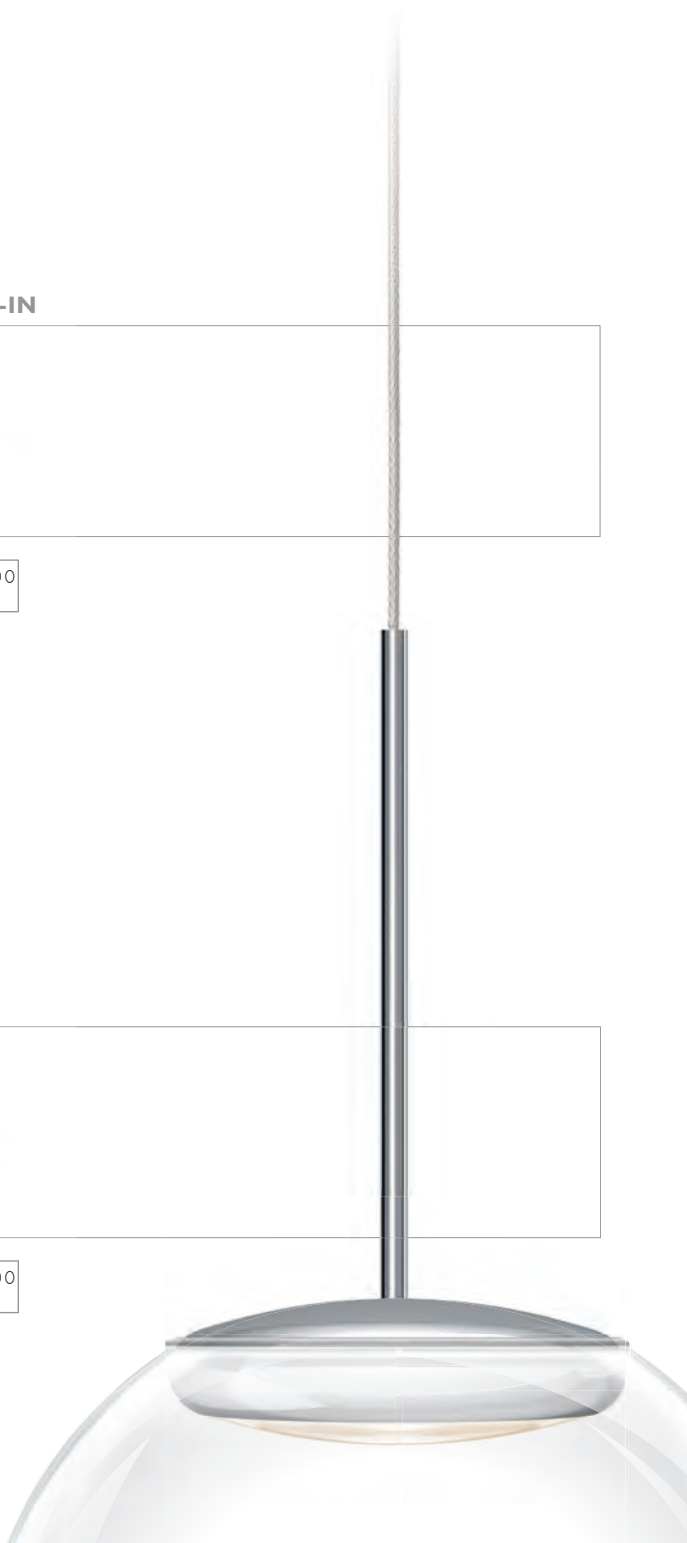



OBERFLÄCHEN / GLÄSER SURFACES / GLASSES



* max. 1500

Glas mundeblasen und
handwerklich mattiert.
Mouth-blown glass,
handmade matted.



Ø189
ch

BLOP DUR

176



Ø189
mcgy

BLOP MOLL

OPTION DIM2WARM

Mit dim2warm leben die Stärken der guten alten Glühbirne weiter. Wenn man sie herunterdimmt, wird das Licht wärmer. Bis hinunter zum Kerzenschein. Die Steuerung erfolgt über einen gewöhnlichen Phasendimmer. Viele BRUCK-Leuchten mit LED erhalten Sie auf Wunsch in einer dim2warm-Variante.

Dim2warm keeps the benefit of the good old standard bulb. When dimming, it is getting warmer – down to candlelight. The control works with a normal phase dimmer. Many BRUCK luminaires with LED are available in a dim2warm version on demand.





Ihr BRUCK-Lichtberater vor Ort:
Your local BRUCK lighting advisor:

01/2022 K99999-860

BRUCK GMBH & CO. KG
INDUSTRIESTRASSE 22A
44628 HERNE
TELEFON:+49(0)2323/591-0
FAX:+49(0)2323/591-100
WWW.BRUCK.DE